

## Mounted Mechanical Precision Planter for No-Till




# PLM

## Product Information

[www.kuhn.com](http://www.kuhn.com)




The mounted mechanical precision planter PLM is a simple machine with a low maintenance index and a variety of options adapted to small farms. The adjustments are made quickly and with total safety, combining ergonomics and versatility. Intended for low power tractors, the PLM provides an excellent result with simplicity and precision.

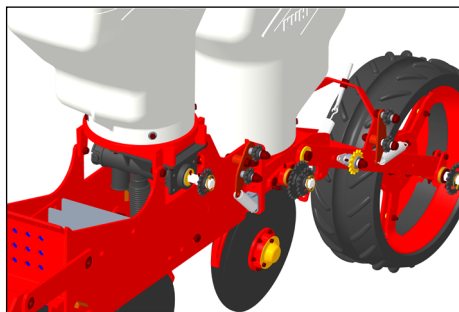

### SIMPLICITY WITH ERGONOMICS

The transmission adjustments are made quickly and safely, without the need for tools.

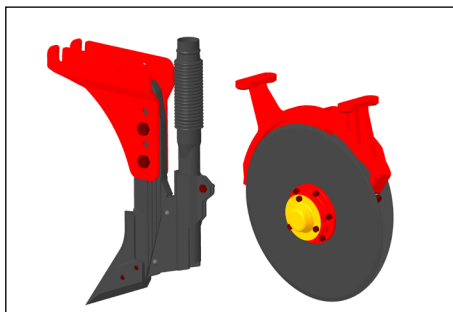

### VERSATILITY IN OPTIONS

The fertilizer row units can be set with double discs or knife, guaranteeing an excellent performance in soft or compacted soils.



### ROBUSTNESS AND DURABILITY

The chassis was made with a tubular beam positioned at 45°, resulting in a simple assembly, with high structural resistance.

## Technical Specifications

PLM


	PLM 2000	PLM 3000	PLM 4000
Number of rows	2	3	4
Row spacing (cm)	90		
Seed hopper capacity (L)	100	150	200
Fertilizer hopper capacity (L)	130	195	260
Seed metering unity	Seed plate		
Fertilizer metering unity	Auger		
Seed transmission system	Transmission by gears		
Fertilizer transmission system	Transmission by gears		
Working width (m)	0,90	1,80	2,70
Transport width (m)	1,80	2,60	3,50
Tires	165 x 70 R13		
Weigth (Kg)	425	615	800
Tractor requirements - lift	3 point hitch system		
Minimum tractor power - with discs (cv)*	55		65
Working speed (Km/h)	4 a 7		

\* Power may vary depending on working conditions

For more information about KUHN products visit:  
[www.kuhn.com](http://www.kuhn.com)

### KUHN DO BRASIL

R. Arno Pini, 1380 - CEP 99050-130 - Passo Fundo/RS

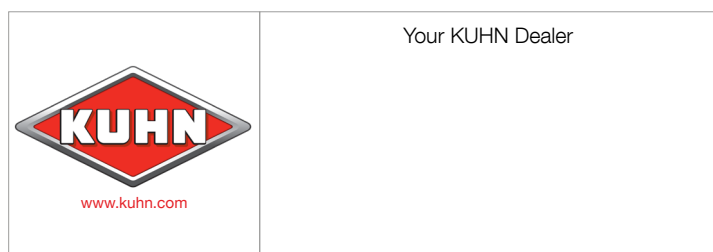

Your KUHN Dealer

Information given in this document is only for information purposes and is non-contractual. Our machines are in compliance with regulations in force in the country of delivery. In our literature, and for improved illustration of certain details, some safety devices may not be in operation position. When operating these machines, these devices must be in position in accordance with the requirements indicated in the operator's manuals and assembly manuals. Respect the tractor gross vehicle weight rating, its lift capacity and maximum load per axle and tires. The tractor front axle load must always comply with the regulations of the country of delivery (in Europe, it must reach minimum 20% of the tractor net weight). We reserve the right to change any designs, specifications or materials listed without further notice. Trademarks cited in this document may be registered in one or several countries.

Also find KUHN on social  
networks

